

ADL3000-E/CT



Current	Maximum current	6A, 100A
	Starting current	Direct connect: 0.004I _b Connect via CT: 0.001I _n
	Consumption	<1VA (Single phase rated current)
Frequency	range	±0.2%
	Accuracy of Active kWh	Class 0.5s
Energy accuracy	Active energy	Class 2
	reactive energy	≤0.5s/d
Pulse	Pulse width	80±20ms
	Pulse constant	400imp/kWh; 6400imp/kWh
Communication	Interface	RS485
	Protocol	Modbus RTU

General

ADL3000-E/CT 3-phase multifunction energy meter is featured of external current transformers which tremendously ease the modification project. The external CTs can be directly connected with other CTs' line which is already on site.

Other than this, the other features of ADL3000-E/CT and ADL3000-E pretty much remain the same except for input current of direct connection

Product Functions

Function	Description	Provide
Measurement of kWh	Active kWh (positive and negative)	■
	Reactive kWh (positive and negative)	■
	A, B, C phase positive kWh	■
Measurement of electrical parameters	U, I, P, Q, S, PF, HZ	■
Measurement of harmonic	2~31 ST voltage and current harmonic	□
LCD Display	8 digits	■
Button	4 keys	■
LED alarm	voltage loss and over voltage	■
Switch I/O	Active switch input	□
	Switch output	□
Data	Maximum demanded kWh and time happened	□
	Frozen data on last 48 months, last 90days	□
	Date, time	□
Communication	Infrared	■
	RS485, MODBUS-RTU	□
Temperature measurement	Support 3 outlay NTC temperature	□

Note: (■: standard; □: optional)

Technical Parameter


Electric performance

Voltage	Reference voltage	3*57.7/100V 3*220/380V 3*100V 3*380V
	Reference frequency	50Hz
	Consumption	<10VA (Single phase)
	Accuracy	±0.2%


Working environment

Temperature	Operating	-25℃~55℃
	Storage	-40℃~70℃
Humidity	≤95%(No condensation)	
Altitude	<2000m	

Dimension drawings (Unit: mm)

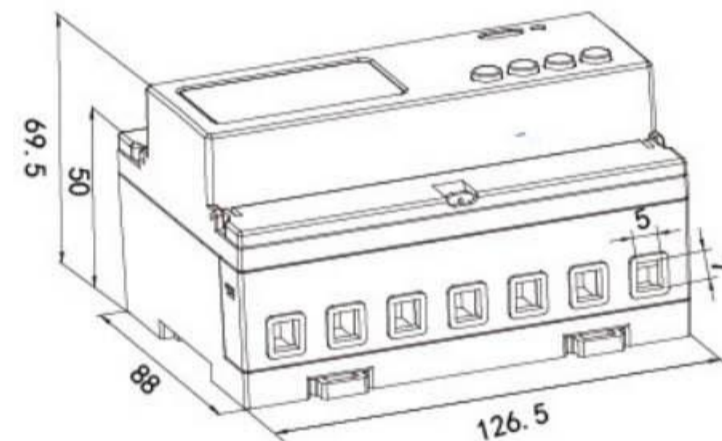

Connect via CT

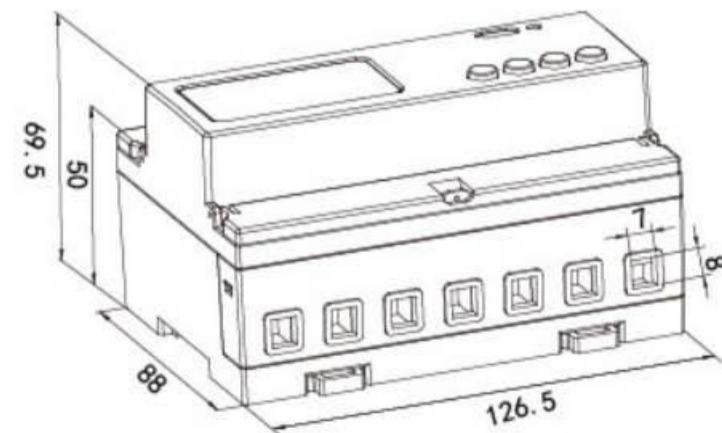


Direct connect


Note: The torque of direct connect should not be greater than 4.0N·m, and the torque of connect via CT should not be greater than 2.0N·m.

Wiring and Installing


■ Wiring

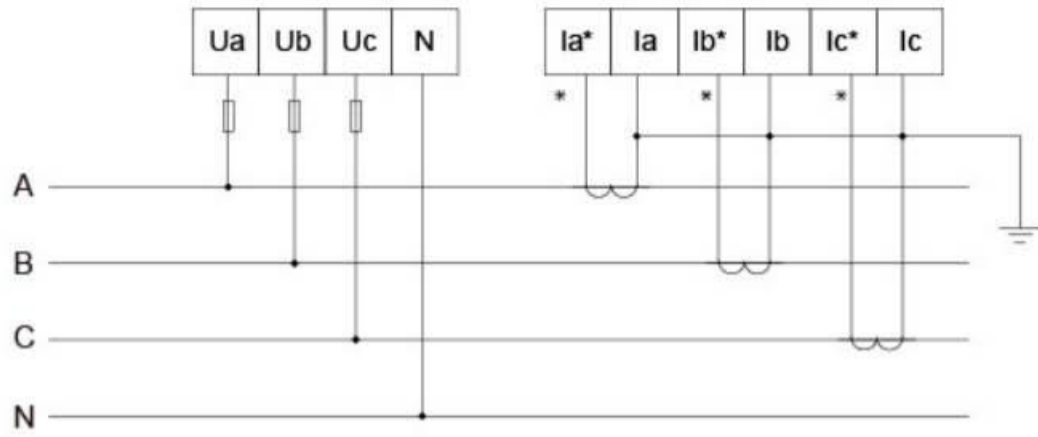


Three phase four lines connect via CT

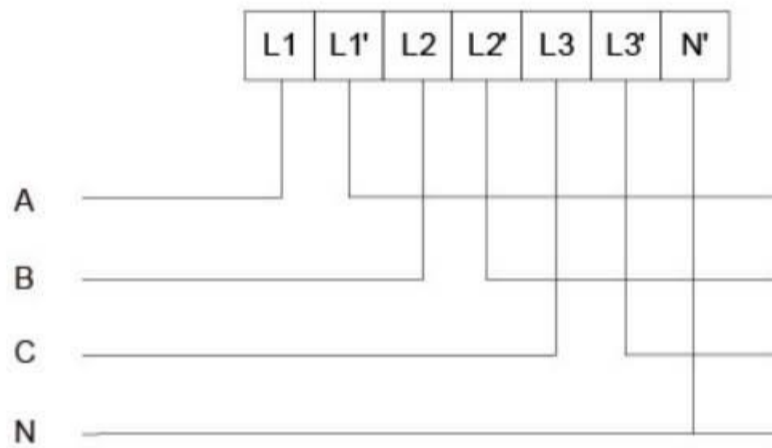


Three phase four lines direct connect

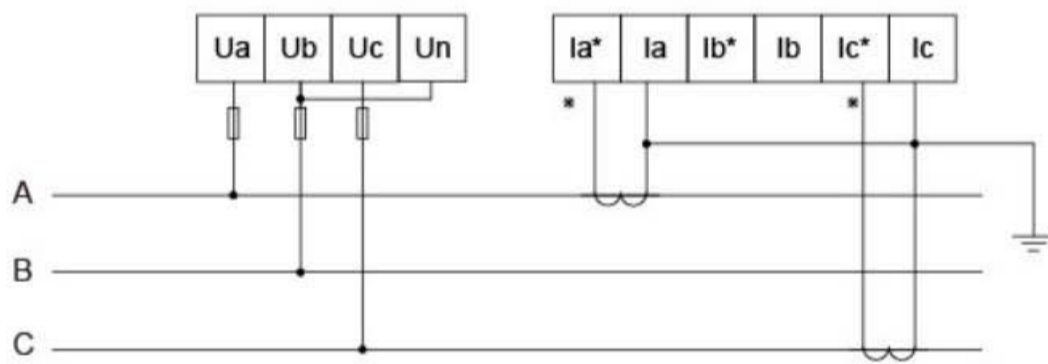


Three phase three lines connect via CT

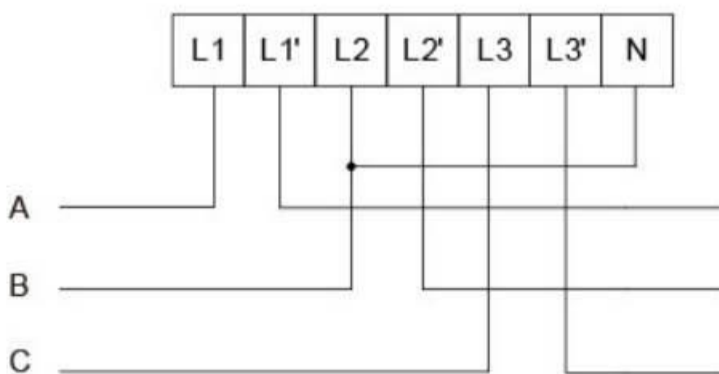


Three phase three lines direct connect

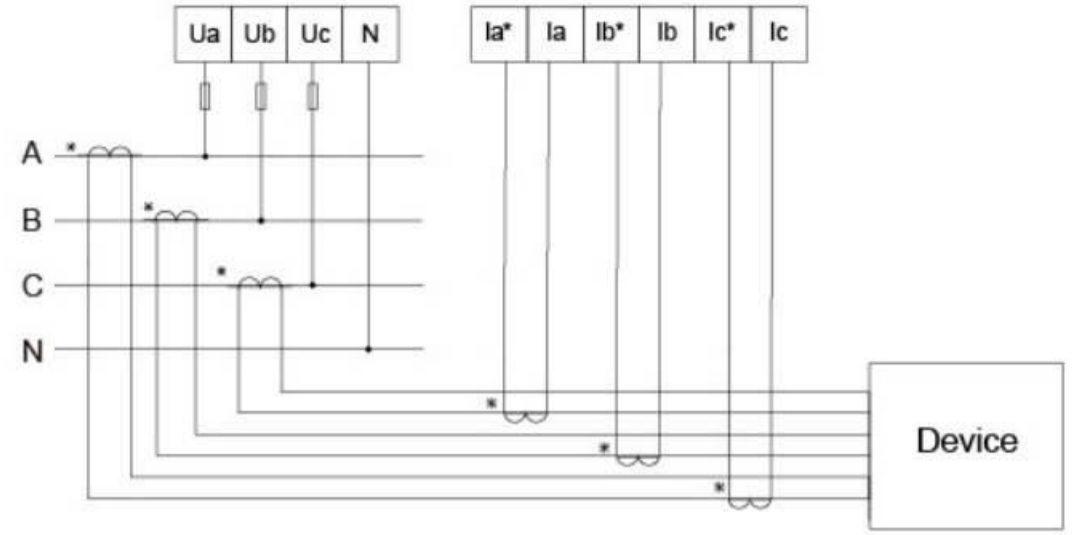


Three phase four lines, 3CT

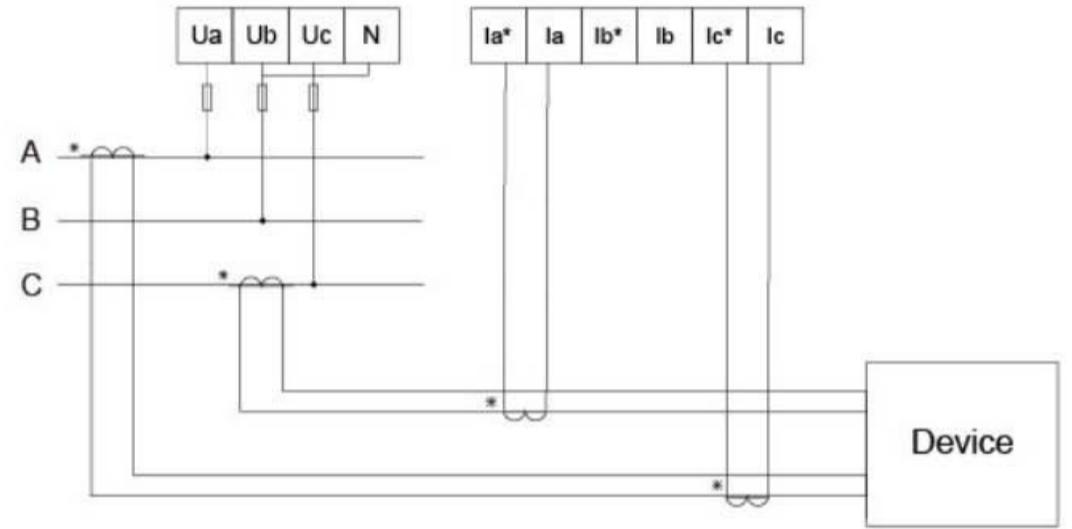


Three phase three lines, 2CT

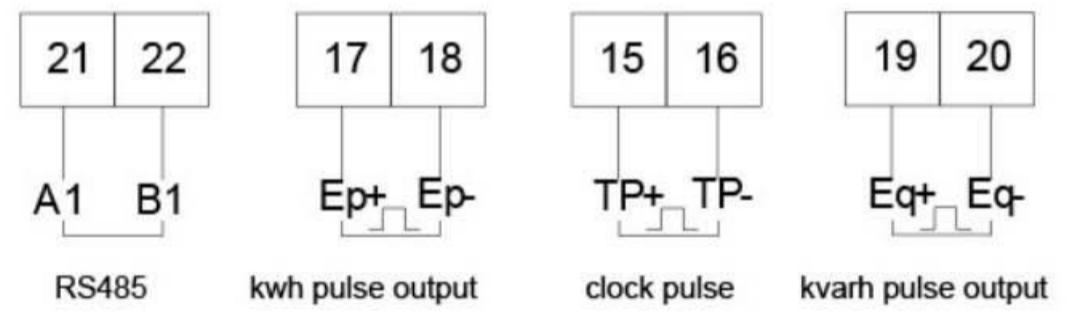

Communication, pulse connection

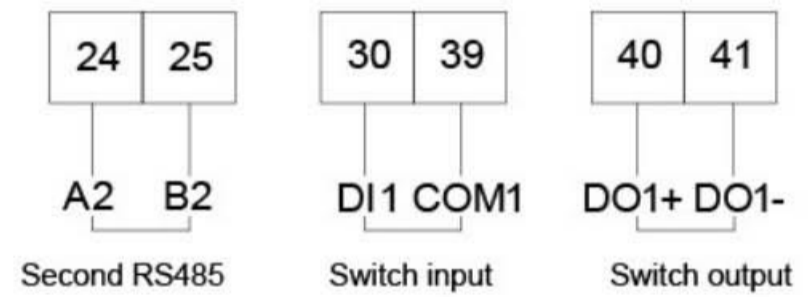

Communication, pulse connection

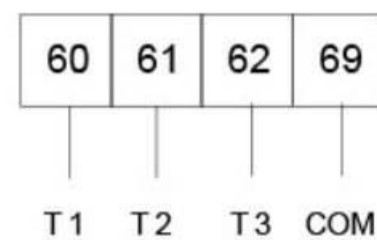

Outlay NTC temperature measurement

■ Installing




Note: DIN 35 mm rail installation.

Display examples



forward active energy

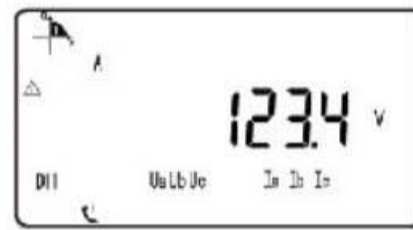

Voltage on A phase



Current on A phase



power